

# Maye-TS Desk fixed luminaires



Modern and simple design style, coupled with exquisite materials and perfect assembly details, the product appearance looks rich in texture. The direct light adopts a diffusion plate with microprism structure to realize anti-glare function, and 90 degrees (direct), 110 degrees (indirect). This product is DIY assembled, no need professionals, fixed on the desk edge by bracket, easy to install, flexible for using. Typically light efficiency is 100LM/W, flicker free. Controlled by touching panel, it can realize 50% DIRECT / 50% INDIRECT lighting synchronous dimming. More importantly, it is able to be supported for Intelligent motion sensor, intelligent constant illumination daylight sensor and wireless control systems such as CASAMBI. The main materials are aluminum profiles, steel plates and PMMA. Designed with Square corner.

## Features

---

Simple, delicate appearance, patent design with rich texture

---

UGR < 18, lighting is uniform and healthy

---

Support for smart control functions

- Touch panel dimming
  - Motion sensor
  - Day light sensor (optional)
  - CASAMBI (Customizable)
- 

5 years warranty

---

## Application Areas



---

For personal offices, public offices and other office space.

---



# Technical data

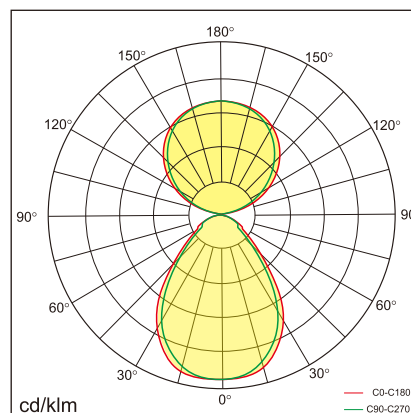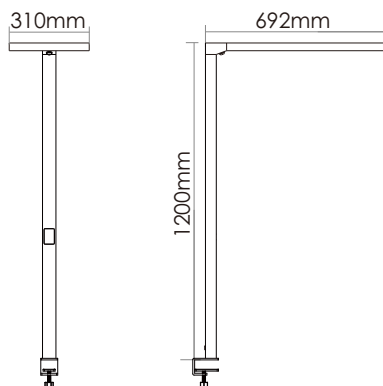

Item No.	BMST-1206030-BD	BMST-1206030-BM	BMST-1206030-CD	BMST-1206030-CM
Input Power	↑30W/30W↓	↑30W/30W↓	↑30W/30W↓	↑30W/30W↓
Input Voltage	AC200~240V	AC200~240V	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9	≥0.9	≥0.9
Luminous Flux	↑3000lm/3000lm↓	↑3000lm/3000lm↓	↑2600lm/2600lm↓	↑2600lm/2600lm↓
UGR	< 18	< 18	< 18	< 18
Color Rendering Index	>80	>80	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑110°/90°↓	↑110°/90°↓	↑110°/90°↓	↑110°/90°↓
CCT	3000/4000/6000K	3000/4000/6000K	3000K~6000K	3000K~6000K
Colour consistency SDCM	< 3	< 3	< 3	< 3
Dimming	Touchpaneldimming	Touchpaneldimming	Touchpaneldimming	Touchpaneldimming
Sensor	Daylight sensor Motion sensor	Motion sensor	Daylight sensor Motion sensor	Motion sensor
Housing Color	Silver/White	Silver/White	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL	6063AL	6063AL
Protection Level	IP20	IP20	IP20	IP20
Storage Temperature	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C
Net Weight	6kg	6kg	6kg	6kg
Package size	1390*465*155mm	1390*465*155mm	1390*465*155mm	1390*465*155mm
20GP	240pcs	240pcs	240pcs	240pcs
40GP	530pcs	530pcs	530pcs	530pcs

## Technical data

Item No.	BMST-1208040-BD	BMST-1208040-BM	BMST-1208040-CD	BMST-1208040-CM
Input Power	↑40W/40W↓	↑40W/40W↓	↑40W/40W↓	↑40W/40W↓
Input Voltage	AC200~240V	AC200~240V	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9	≥0.9	≥0.9
Luminous Flux	↑4000lm/4000lm↓	↑4000lm/4000lm↓	↑3400lm/3400lm↓	↑3400lm/3400lm↓
UGR	< 18	< 18	< 18	< 18
Color Rendering Index	>80	>80	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑110°/90°↓	↑110°/90°↓	↑110°/90°↓	↑110°/90°↓
CCT	3000/4000/6000K	3000/4000/6000K	3000K~6000K	3000K~6000K
Colour consistency SDCM	< 3	< 3	< 3	< 3
Dimming	Touchpaneldimming	Touchpaneldimming	Touchpaneldimming	Touchpaneldimming
Sensor	Daylight sensor Motion sensor	Motion sensor	Daylight sensor Motion sensor	Motion sensor
Housing Color	Silver/White	Silver/White	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL	6063AL	6063AL
Protection Level	IP20	IP20	IP20	IP20
Storage Temperature	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C
Net Weight	6kg	6kg	6kg	6kg
Package size	1390*465*155mm	1390*465*155mm	1390*465*155mm	1390*465*155mm
20GP	240pcs	240pcs	240pcs	240pcs
40GP	530pcs	530pcs	530pcs	530pcs

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Of ce: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in speci cation are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.