


# NEWA wall mounted luminaire

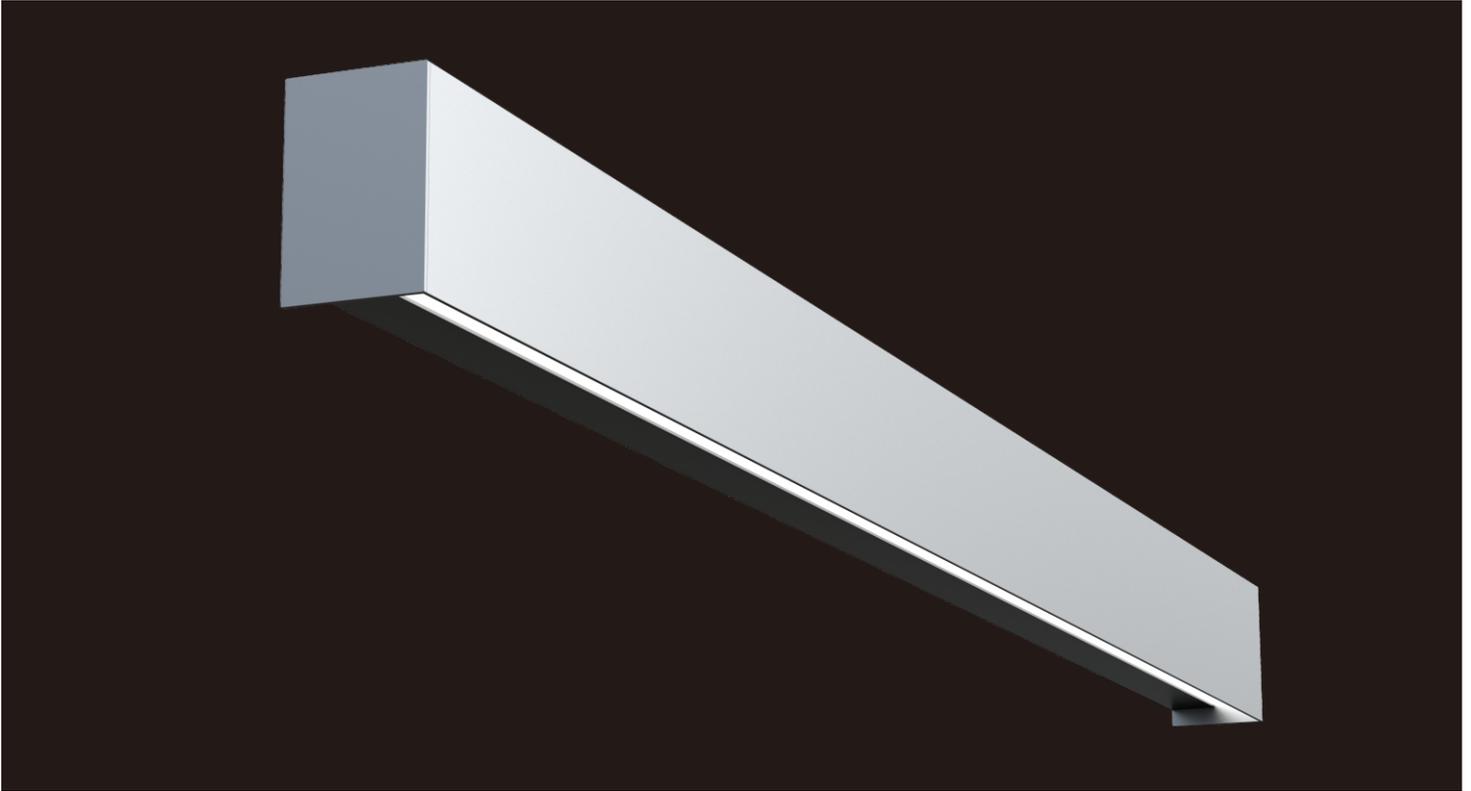

NEWA is a linear wall lamp with a new concept. The lamp engine and the cover are separately mounted. The connection of the lamp body is easy to operate, and the gap after connection is adjustable. Application installation is more convenient, lighting effect is more comfortable, more texture. It is a good solution to the two traditional problems of traditional linear wall lamp application, such as difficult wiring and uncomfortable glare caused by excessive concentration of light source on 10-15cm wall.

NEWA engine and cover are made of 6063 aluminum, the surface is dusting process, built-in power supply and input and output wiring plug, the process details are perfect, the appearance is exquisite.

NEWA supports 1-10v dimming, DALI dimming, which can be widely used in almost all office space supplementary lighting applications, making the space light more comfortable and less glare

## Features

---

Linkable wall lamp to avoid wiring problems,  
one input support 30 meters

---

Both direct and indirect light wash the wall with 650mm height,  
uniformity light, Low glare

---

Impressive easy for installation and maintenance

---

Support DALI and 1-10V Dimming

---

High lumen efficiency, up to 130LM/W

---

SDCM < 3

---

5 years warranty

---

## Application Areas




---

For open plan office, stairs, corridors and other office space.

---



## Technical data

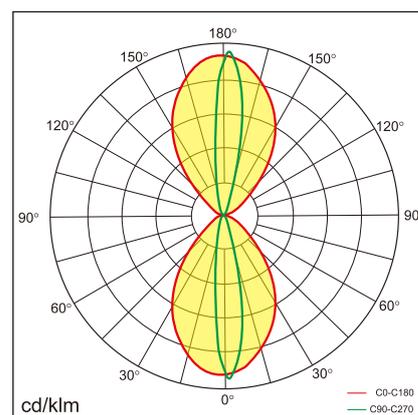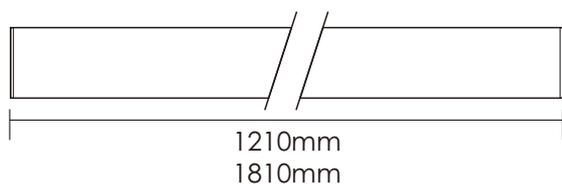

Item No.	BNEW-1203015-NN	BNEW-1203015-VN	BNEW-1203015-DN
Input Power	↑15W/15W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑1800lm/1800lm↓		
UGR	<19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	/		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3kg		
Package size	1275*430*300mm		
20GP	1160PCS		
40GP	2576PCS		

## Technical data

Item No.	BNEW-1805025-NN	BNEW-1805025-VN	BNEW-1805025-DN
Input Power	↑25W/25W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑3000lm/3000lm↓		
UGR	<19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	/		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	4.3kg		
Package size	1875*430*300mm		
20GP	792PCS		
40GP	1752PCS		

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Office: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.